


Secured and Rugged LTEWLAN Router for IIoT

WR322GR Series

Industrial Secure Cellular Router

Innovative industrial secure LTE router WR322GR Series is designed for IIoT applications by dual-radio high-speed LTE routing and WLAN networks. Dual RS232/422/485 ports with Modbus support brings sensor and meter data to cloud wirelessly. The WR322 router supports LTE to WLAN redundancy and LTE/WLAN auto offload to guarantee continuous connections. To safeguard cybersecurity, security features such as Firewall, OpenVPN, GRE tunnel are supported. The embedded MQTT and RESTful API enables instant public cloud integration such as AWS or Azure. The private cloud platform ThingsMaster and ThingsMaster OTA can also be set up for an instant and secured access to receive data or manage devices remotely.



ThingsMaster OTA
ThingsMaster NetMaster



Features & Benefits

High speed 4G LTE & Wi-Fi Network

- LTE Cat.4, 2x2 MIMO, 150M downlink and 50M uplink
- LTE Cat.6 with 2CA, 2T2R MIMO provides 300M downlink and 50M uplink
- 4G/3G/2G full cellular network compatibility
- Support GPS for location services
- IEEE 802.11ac compliant & backward compatible with 802.11a/b/g/n
- Selectable 5G/2.4G Wi-Fi for local coverage, up to 866Mbps bandwidth
- Optional NBLoT + M1**
LTE FDD: B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B26/B28
LTE TDD: B39 (For Cat M1 Only)

Serial Communication & High Throughput Data Switching

- Dual serial ports with RS232/422/485 full functions for serial over LTE/Wi-Fi/Ethernet data switching
- 2-port Gigabit Ethernet supports routing and bridging mode
- Close to wire-speed NAT routing performance
- Hardware NAT for CPU utilization saving

Dynamic Routing with Redundancy Protection

- RIPv1&v2, OSPFv1&v2 for intra-domain routing within an autonomous system
- Efficient unicast/multicast* static routing
- VRRP guarantees sustainable routing in a single point of failure

Rugged Design for Wayside Surveillance, ITS Application

- EN50121-4 railway trackside EMC certificate design for Industrial IoT, ITS applications
- Effective heat dissipation design for operating in -40~75°C environments
- CE Marking
- IEC61000-6-2/IEC61000-6-4 heavy industrial EMC compliance

Enhanced Cyber Security & Redundancy


- Firewall for inbound/outbound traffic
- OpenVPN (server/client), IPsec for secure remote connection
- L2TP with PPP, PAP, CHAP(LCP, IPCP)
- GRE tunnel
- HTTPs/SSH secure login
- TACACS+ multi-user authentication for privileged user management
- Cellular to WAN redundancy, dual SIM backup
- Cellular to WLAN auto offload
- RSTP spanning tree protocol

Industrial IoT LAN & Cloud Management

- Embedded Amazon AWS & Microsoft Azure cloud service
- Various configuration paths, including CGI WebGUI, CLI, SNMP and RMON*
- 1:1 NAT, port forwarding and NAPT for local traffic protection
- ARP response over 802.2 LLC SNAP
- Support SNMPv3 and entity-MIB (RFC4133), MIB II (RFC1213)
- NTP v3 time management
- WoMaster Software Utilities
 - NetMaster:** Network Management System with VLAN visualization* and ERPS* Ring
 - ViewMaster:** Configuration Management
 - ThingMaster:** Interactive monitoring dashboard to collect data from field devices
 - ThingMaster OTA:** Realtime map showing the status, signal strength, location of the remote devices, over-the-air batch device registration, configuration and firmware upgrade*, alerts on critical events to prevent downtime
- Support MQTT protocol, ready to use AWS/Azure and Private Cloud Agent for cloud management
- LLDP* for topology control, auto-topology drawing
- USB for easy field configuration and firmware update
- Diagnostic tool includes Ping, TFTP, SNMP Trap, E-mail Alert and System Log




✓ Ready Total Solution for IoT

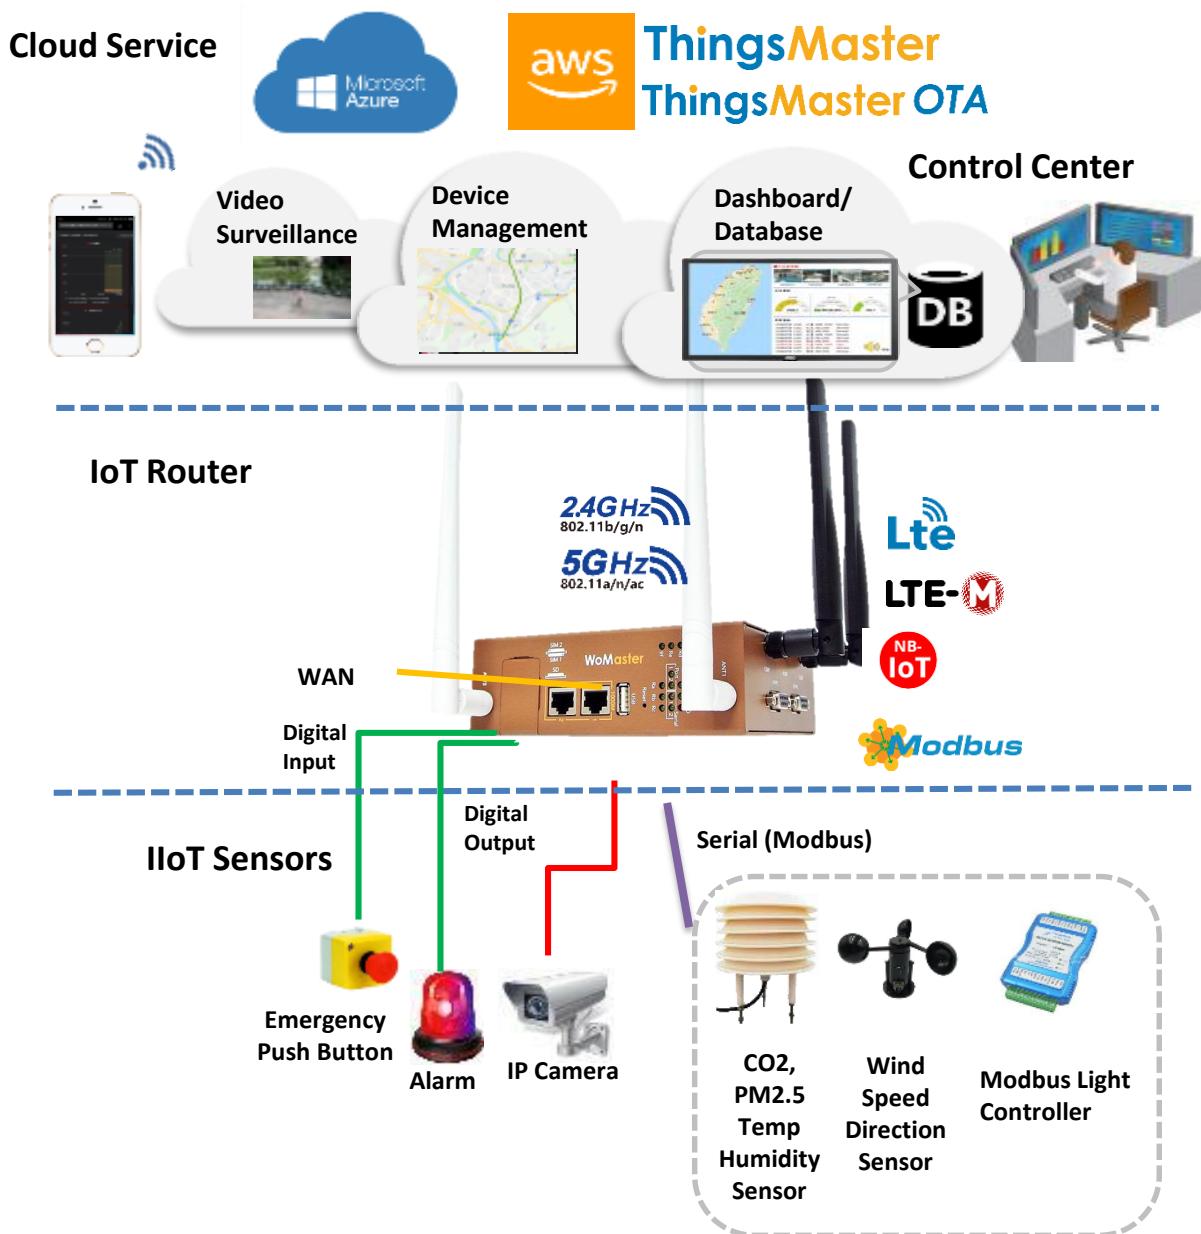


✓ Secured Remote Access by VPN

WR322 can act as VPN server for data encryption and dynamic remote access. Multiple VPN protocols are supported such as OpenVPN, GRE, and L2TP. The channels between multiple networks, ex. private/public/hybrid networks are fully secured and with authentication features.

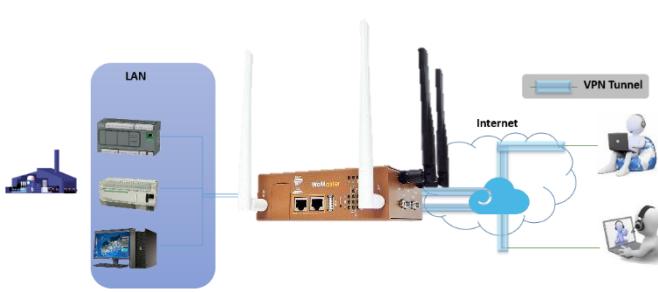

✓ Cyber Security Guard

The stateful firewall can monitor the status of connection at all time. Multiple industrial fieldbus protocols, ex. Modbus TCP*, EtherNet/IP* are also supported for factory automation applications.

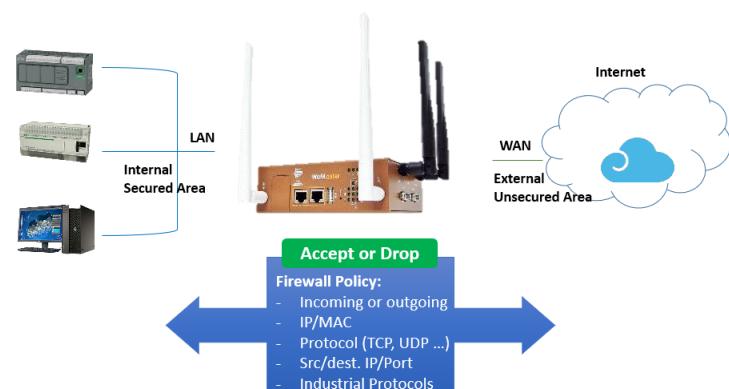



Features & Benefits

Secure IoT Modbus Tags

Tag-based data acquisition with MQTT support

MQTT client acting as publisher and subscriber

The latest TLS encryption and X.509 authentication

Selectable serial port and data type. Sensor alive check and display sensor value.

Home > IoT > Modbus Device

AWS IoT Azure IoT Private IoT Modbus Device RMS

Modbus Logging

Modbus Logging	<input checked="" type="checkbox"/> Enable
Name	Ex: CO2, Temperature
Serial	1
Slave ID	Ex:1
PLC Address	Ex:1
Function	03 Read Holding Registers
Data Type	uint16
<input type="button" value="Submit"/> <input type="button" value="Cancel"/>	

// Tag Name

// Slave Address

// Data Address, Register Address

Modbus RTU Slave Tag List

Select	Name	Serial	Slave ID	Address	Function Code	Data Type	Edit	Alive	Value
<input type="checkbox"/>	PM1	1	4	1	03	int16	<input type="button" value="Edit"/>	Yes	10
<input type="checkbox"/>	PM2_5	1	4	2	03	uint16	<input type="button" value="Edit"/>	Yes	13
<input type="checkbox"/>	PM10	1	4	3	03	uint16	<input type="button" value="Edit"/>	Yes	13
<input type="checkbox"/>	CO2	1	1	562	03	uint16	<input type="button" value="Edit"/>	Yes	1107
<input type="checkbox"/>	Temperature	1	1	564	03	int16	<input type="button" value="Edit"/>	Yes	255
<input type="checkbox"/>	Humidity	1	1	566	03	int16	<input type="button" value="Edit"/>	Yes	629
<input type="checkbox"/>	Temperature_f	1	1	03	float	<input type="button" value="Edit"/>	Yes	25.486820	

Secured Multi-sites Management

N to N VPN


Latest TLS encryption and X.509 authentication

✓ Built-in Microsoft Azure and Amazon AWS agent

✓ Multi-Level User Passwords

Different centralized authentication servers are supported such as RADIUS and TACACS+. Using a central authentication server simplifies account administration, when you have more than one switches in the network.

Authentication Chain is also supported. An authentication chain is an ordered list of authentication methods to handle more advanced authentication scenarios. For example, you can create an authentication chain which first contacts a RADIUS server, and then looks in a local database if the RADIUS server does not respond.

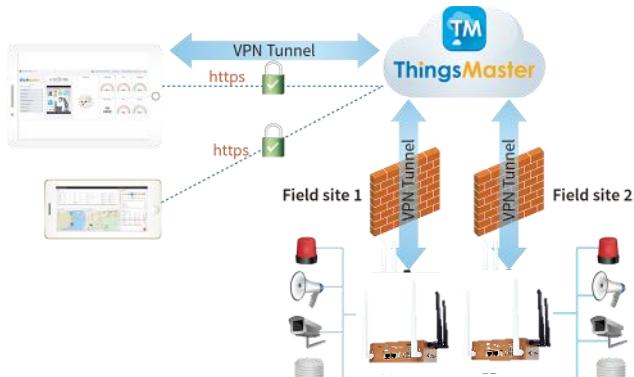

✓ ThingsMaster OTA (device management over the air)


The OTA agent embedded in WR322 upgrades device management over the air, anywhere you are and any time you want over your mobile devices. ThingsMaster OTA is a secured local OTA software that can be installed in a private or public server or even QNAP NAS (network attached storage). With OTA, all device information such as location, warning event can be shown in real time. The maintenance such as configuration reload, or device reboot can also be run by group.



Interfaces

System LED

- 1 x Power
- 1 x System Status
- 1 x DO
- 2 x Ethernet Port
- 1 or 2 x Serial Port (By Model)
- 6 x Radio LED (Ra~Rf)

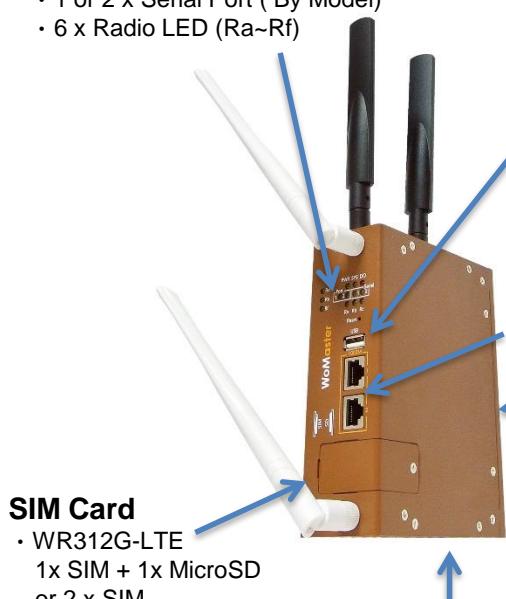

USB Extension Port

- USB for Configuration/ Firmware update
- External Storage

Gigabit Ethernet

- 2-port 10/100/1000M RJ45
- WAN + LAN configurable


DIN Clip

Integrated Power Connector

- 1 x 6-pin terminal block
- 4 pin for redundant power
- 2 pin DO

	WR312G-LTE	WR322GR-WLAN+LTE
Ant 1	LTE-Main	Wi-Fi 1
Ant 2	LTE- Diversity/ GPS (by model)	Wi-Fi 2
Ant 3	-	LTE-Main
Ant 4	-	GPS (by model)
Ant 5	-	LTE-Diversity

*Antenna: Wi-Fi in White; LTE in Black

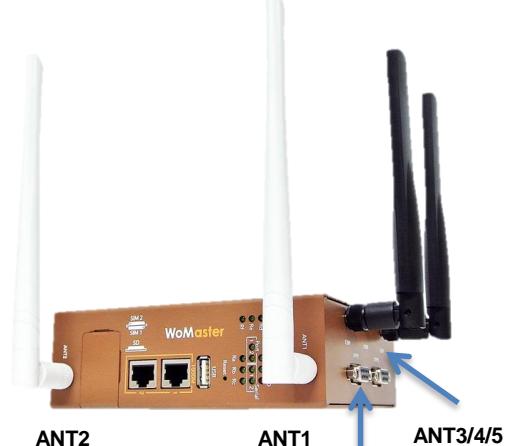


Serial Communication

- RS232/422/485 Full functions
- DB9 female





Dimensions

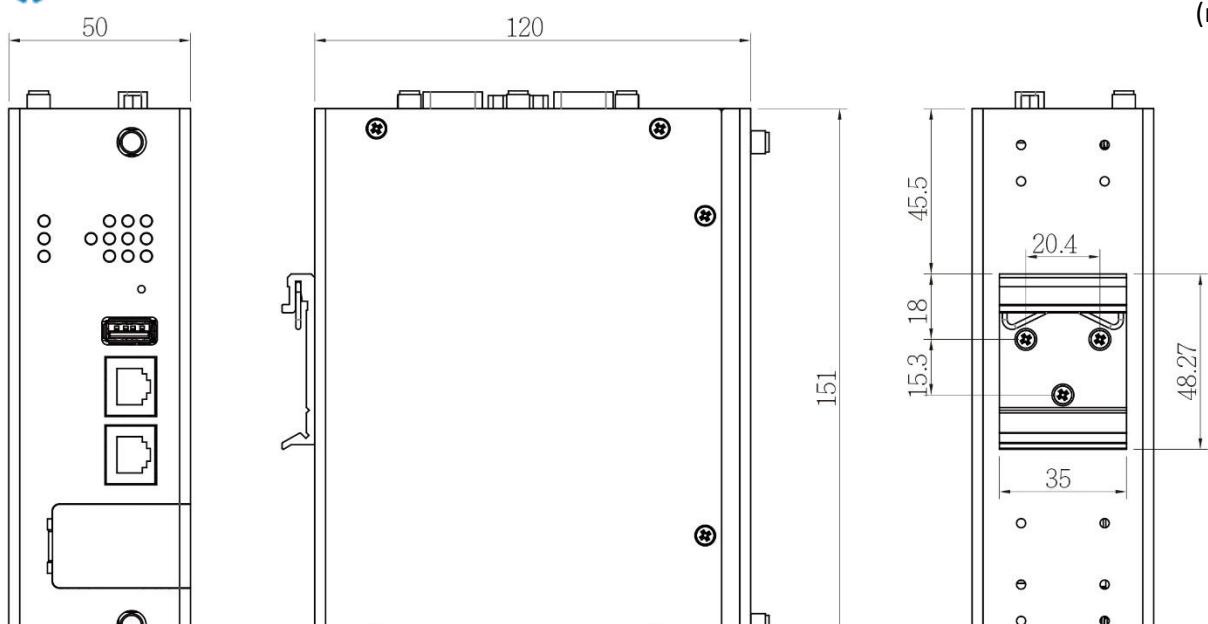

Top

Bottom

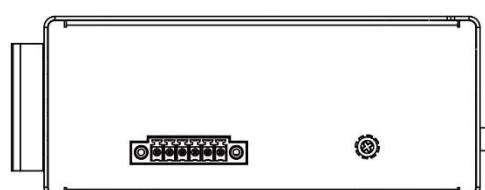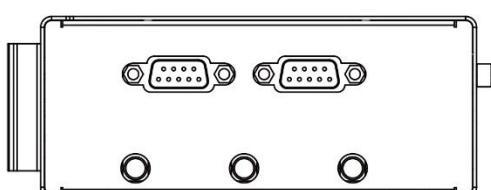




Technology

Standard	3GPP Release 11/12 Long Term Evolution (LTE), fallback 3GPP Release 7,8,9 for HSPA/UMTS IEEE 802.11ac wireless local area network (WLAN), Backward support 802.11n/g/a/b Wireless LAN IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000Base-T Gigabit Ethernet Copper IEEE 802.1D-2004 Rapid Spanning Tree Protocol (RSTP) IEEE 802.1Q for VLAN
-----------------	---

Interface

Ethernet Port	2 x 10/100/1000MBase-T RJ45, Auto Negotiation, Auto-MDI/MDIX																																								
System LED	1 x PWR: Green On 1 x SYS: Ready: Green On, Firmware Updating: Green Blinking 1 x DO: Red On 2 x Ethernet Ports: Link: Green On, Activity: Green Blinking 2 x Serial Ports (Serial 1/2, by model): Activity: Green Blinking WR312G-LTE: 3 x Radio (Ra, Rb, Rc): Radio status Ra: SIM detected: Green On, SIM not inserted: Off Rb: 2/3G connection: Green On, Not 2/3G connection: Off Rc: 4G connection: Green On, Not 4G connection: Off WR322GR-WLAN+LTE: 6 x Radio (Ra, Rb, Rc, Rd, Re, Rf): Radio status Ra: AP mode: Green On, Station mode connected: Green Blinking, Station mode/radio disable: Off Rb/Rc: Reserved Rd: SIM detected: Green On, SIM not inserted: Off Re: 4G connection: Green On, 2/3G connection: Green Blinking, disconnected: Off Rf: Base station connected: Green On for 2 sec period, Base station disconnected: Green Off for 2 sec period																																								
USB	1 x USB for Configuration/Firmware Update																																								
Reset	System Reset(2~6 Seconds) / Default Settings Reset(over 7 Seconds)																																								
SMA Socket	WR312G-LTE: Up to 2 x RP-SMA Female LTE 2T2R: ANT1 for LTE Main, ANT2 for LTE Aux OR LTE + GPS: ANT1 for LTE Main, ANT2 for GPS WR322GR-WLAN+LTE: Up to 5 x RP-SMA Female Wi-Fi 2T2R: ANT1 for Wi-Fi1, ANT2 for Wi-Fi2, LTE 2T2R: ANT3 for LTE Main, ANT 5 for LTE Aux GPS: ANT4																																								
SIM Socket	2 x Nano SIM with redundancy																																								
MicroSD	(Only for E Series) 1x for field diagnostic data logging																																								
Serial	Up to 2 x RS232/422/485, DB9  <table border="1"> <thead> <tr> <th>Pin</th> <th>RS232</th> <th>RS485-4w/422</th> <th>RS485-2w</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>DCD</td> <td>TX-</td> <td>Data-</td> </tr> <tr> <td>2</td> <td>TXD</td> <td>RX+</td> <td>-</td> </tr> <tr> <td>3</td> <td>RXD</td> <td>TX+</td> <td>Data+</td> </tr> <tr> <td>4</td> <td>DSR</td> <td>-</td> <td>-</td> </tr> <tr> <td>5</td> <td>GND</td> <td>GND</td> <td>-</td> </tr> <tr> <td>6</td> <td>DTR</td> <td>RX-</td> <td>-</td> </tr> <tr> <td>7</td> <td>CTS</td> <td>-</td> <td>-</td> </tr> <tr> <td>8</td> <td>RTS</td> <td>-</td> <td>-</td> </tr> <tr> <td>9</td> <td>RI</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Pin	RS232	RS485-4w/422	RS485-2w	1	DCD	TX-	Data-	2	TXD	RX+	-	3	RXD	TX+	Data+	4	DSR	-	-	5	GND	GND	-	6	DTR	RX-	-	7	CTS	-	-	8	RTS	-	-	9	RI	-	-
Pin	RS232	RS485-4w/422	RS485-2w																																						
1	DCD	TX-	Data-																																						
2	TXD	RX+	-																																						
3	RXD	TX+	Data+																																						
4	DSR	-	-																																						
5	GND	GND	-																																						
6	DTR	RX-	-																																						
7	CTS	-	-																																						
8	RTS	-	-																																						
9	RI	-	-																																						
Power Input, Digital Output	6-Pin Removable Terminal Block Connector 4 Pin for Redundant Power 2 Pin for DO (Relay Alarm) DO: Dry Relay Output with 1A/24V DC																																								

Cellular Properties		(LTE Cat. 6)
Standard	UMTS/HSPA 3GPP Release 8 LTE 3GPP Release 12 (LTE Cat.6)	
Data Rate	TD-SCDMA: DL Max 4.2Mbps, UL: Max 2.2Mbps HSPA: DL: Max. 42 Mbps, UL: Max. 5.76 Mbps WCDMA: DL: Max 384Kbps, UL: Max 384Kbps LTE-FDD: DL: Max. 300 Mbps, UL: Max. 50 Mbps, 2x2 DL MIMO LTE-TDD: DL: Max. 226 Mbps, UL: Max. 28 Mbps, 2x2 DL MIMO	
Band Information: LTE-E	LTE-FDD: B1/B3/B5/B7/B8/B20/B28/B32 (2100/1800/850/2600/900/800/700/1500MHz) LTE-TDD: B38/B40/B41 (2600/2300/2500MHz) WCDMA: B1/B3/B5/B8 (2100/1800/850/900MHz)	
Band Information: LTE-U	LTE-FDD: B2/B4/B5/B7/B12/B13/B17/B25/B26/B29/B30/B66 (1900/1700/700/2600/700/700/1900/850/700/2300/1700MHz) LTE-TDD: B41 (2500MHz) WCDMA: B2/B4/B5 (1900/1700/850MHz)	
Band Information: LTE-AP	LTE-FDD: B1/B3/B5/B7/B8/B18/B19/B21/B26 (2100/1800/850/2600/900/850/850/1500/850MHz) LTE-TDD: B38/B39/B40/B41 (2600/1900/2300/2500MHz) WCDMA: B1/B5/B6/B8/B9/B19 (2100/850/UMTS only/900/1800/850MHz) TD-SCDMA: B39 (1900MHz)	
Cellular Properties		(LTE Cat. 4)
Standard	GSM/GPRS/EDGE 3GPP Release 6 UMTS/HSPA 3GPP Release 8 LTE 3GPP Release 11	
Data Rate	GPRS: DL: max. 85.6 kbps, UL: max. 85.6 kbps EDGE: DL: max. 236.8 kbps, UL: max. 236.8 kbps HSPA: DL: max. 42 Mbps, UL: max. 5.76 Mbps LTE-FDD Cat.4: DL: max. 150 Mbps, UL: max. 50 Mbps, 2x2 DL MIMO LTE-TDD Cat.4: DL: max. 130 Mbps, UL: max. 35 Mbps, 2x2 DL MIMO	
Band Information: LTE-E	LTE: FDD B1/B3/B5/B7/B8/B20 (2100/1800/850/2600/900/800MHz) LTE: TDD B38/B40/B41 (2600/2300/2500MHz) WCDMA: FDD B1/B5/B8 (2100/850/900MHz) GSM: B3/B8 (1800/900MHz)	
Band Information: LTE-AU	LTE: FDD B1/B2/B3/B4/B5/B7/B8/B28 (2100/1900/1800/1700/850/2600/900/700MHz) LTE: TDD B40 (2300MHz) WCDMA: FDD B1/B2/B5/B8 (2100/1900/850/900MHz) GSM: B2/B3/B5/B8 (1900/1800/850/900MHz)	
Band Information: LTE-U	LTE: FDD B2/B4/B12 (1900/1700/700MHz) WCDMA: B2/B4/B5 (1900/1700/850MHz)	
Band Information: LTE-CN	LTE FDD: B1/B3/B5/B8 (2100/1800/850/900MHz) LTE TDD: B38/B39/B40/B41 (2600/1900/2300/2500MHz) TD-SCDMA: B34/B39 (2000/1900MHz) WCDMA: B1/B8 (2100/900MHz) CDMA: BC0 GSM: 900/1800MHz	
GPS Properties		
GNSS	GPS/GLONASS/BeiDou/Galileo	
Performance	Cold start: 18s, Warm start: 2.2s, Hot start: 1.8s	
Sensitivity	Cold start: -146dBm, Reacquisition: -157dBm, Tracking: -157dBm	
Accuracy	<1.5M	
GNSS Frequency	GPS/Galileo: 1575.42±1.023 MHz GLONASS: 1597.5~1605.8 MHz BeiDou: 1561.098±2.046 MHz	
Antenna (Optional Accessory- A-GPS-27-RSM-3M)	Frequency range: 1561~1615MHz Polarization: RHCP or linear VSWR: <2 (Typ.) Passive antenna gain: >0dBi	
Wi-Fi Properties		
Standard	IEEE 802.11ac/a/b/g/n, 2T2R MIMO 802.11ac: OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)	
Data Rate	802.11ac: MCS0 ~ 9, max. 866Mbps 802.11b: 11Mbps / 802.11a/g: 54Mbps / 802.11n: MCS0 ~ 15, max. 300Mbps Check detail TX/RX information in User Manual	
Frequency	ISM Band, 2.412GHz ~ 2.472GHz, 5.180MHz ~ 5.825MHz(Band 1,4)	
RSSI	≤20db, compliant with CE request	

Antenna	
LTE Default Antenna	Frequency: 704~960/1710~2690 MHz
	Gain: 2 dBi
	Dimension: 161xΦ13 mm
Wi-Fi Default Antenna	Frequency: 2400~2500/ 4900~5900 MHz
	Gain: 2.4GHz: 2.5 dBi, 5GHz: 3dBi
	Direction: Omni-directional
Power Requirement	
Input Voltage	24V (12~48VDC)
Reverse Polarity Protect	Yes
Input Current	WR312G-LTE: 0.23A@24V WR322GR-WLAN+LTE: 0.26A@24V
Power Consumption	WR312G-LTE: Max 5.52W@24VDC full traffic, suggest to reserve 15% tolerance WR322GR-WLAN+LTE: Max 6.24W @24VDC full traffic, suggest to reserve 15% tolerance
Software	
Management	CGI WebGUI, Command Line Interface (CLI), IPv4/IPv6*, Telnet, SNMP v1/v2c/v3, DDNS, DHCP server/client, DHCP Relay, TFTP, System Log, SMTP, ARP response over 802.2 LLC SNAP, Proxy ARP, DNS (client/proxy), PPPoE*
Traffic Management	Flow Control*, Traffic shaping
Filter	IEEE802.1Q VLAN
Security	IEEE 802.1X/RADIUS, TLS v1.2, HTTPS/SSH, First login password management WLAN AP Security: Share Key, WPA/WPA2-PSK(Pre-Shared Key), WPA/WPA2 Enterprise Encryption: 64/128-bit WEP(Wired Equivalent Privacy), TKIP(WPA-PSK), AES(WPA2-PSK), MAC Filter
Advanced Security	TACACS+, Multi-user authentication
Time Management	NTP, SNTP, Cellular Time
Redundancy Protocol	WAN/LTE Redundancy, Rapid Spanning Tree Protocol (RSTP)
WAN / Routing / NAT/ Firewall / VPN	Routing: RIPv2, OSPFv2, VRRPv2 NAT: 1-1 NAT, NAPT(SNAT/DNAT), Port Forwarding, DMZ Firewall: Stateful Inspection firewall, IP/Port Filter VPN: IPSec, OpenVPN (Multipoint VPN), L2TP, GRE, PPTP, MGRE*
Watchdog	Hardware watchdog for system status monitoring Software cellular watchdog/ ping watchdog for connection monitoring
IIoT Industrial Protocol	Modbus RTU, MQTT, RESTful API
Private Cloud	ThingsMaster, ThingsMaster OTA
Public Cloud	AWS Agent, Azure Agent
Location	Google map, Baidu map
MIB	MIB-II, Entity MIB, WoMaster Private MIB
Utility	ViewMaster, NetMaster, Ping, Traceroute, IP SLA*
Serial communication	TCP Server/TCP Client/UDP mode, TCP Alive check, Force TX Delimiter/Timeout/interval/length, Long Distance Termination
Cellular Configuration	Radio on/off, 2G, 3G and 4G modes configurable, SIM Security, Connection Status, Cellular to Eth-WAN Redundancy, GPS positioning (by model), Backup SIM Retry (1-10 times)
WLAN Configuration	WLAN Basic Settings: Radio on/off, AP/client mode, 2.4G 11n/5G 11ac Band and Frequency selection, SSID/Multi-SSID configuration, SSID broadcast, VLAN ID, WLAN to LAN Link fault pass-through*, Cellular to WLAN Auto Offload and advanced WLAN settings, 802.1X
Mechanical	
Installation	DIN Rail
Enclosure Material	Steel Metal with Aluminum
Dimension	50 x 151 x 120 mm(W x H x D) / without DIN Rail Clip
Ingress Protection	IP30
Weight	WR312G: ~600g without package WR322GR: ~660g without package

*By Request

Environmental	
Operating Temperature & Humidity	-40°C~75°C , 5%~95% Non- Condensing
Storage Temperature	-40°C~85°C
MTBF	>200,000 hours at 40° full cycle
Warranty	5 years
Approval	
Safety	EN 60950-1 Compliance EN 62368-1:2014/AC:2017 Compliance IEC 60255-27:2013 Compliance
EMC	EN61000-6-2/EN61000-6-4 Compliance
EMI	CISPR 22, FCC part 15B Class A Compliance
EMS	EN61000-4-2 ESD, EN61000-4-3 RS, EN61000-4-4 EFT, EN61000-4-5, EN61000-4-6 CS, EN61000-4-8 Magnetic Field EN61000-4-12/16/17/18/29
Radio	RED Compliance Safety: EN 62368-1 EN 50385/EN62311 MPE assessment EN 301 489-1/17/19/52, EN 55032/55024 EN 300 328/EN 301 893 EN 301 908-1 FCC Part 15B
Railway	EN50121-4
Environmental	EN 60870-2-2:1998 Compliance IEC 60068-2-21:2006 Compliance

Product Selection Guide

Model	Series	Firmware	Eth-WAN	Eth-LAN	Serial	Radio 1	Radio 2	USB	SD	SIM	GPS	DI/DO
WR302G	-	Embedded	1 x GE	1 x GE	2 x RS232/422/485	-	-	1	1	-	-	0/1
WR312G-WLAN		Embedded	1 x GE	1 x GE	2 x RS232/422/485	Wi-Fi 2.4G 11n/5G 11ac	-	1	1	-	-	0/1
WR312G-LTE		Embedded	1 x GE	1 x GE	2 x RS232/422/485	LTE Cat.4	-	1	1	1	-	0/1
WR312G-LTE6		Embedded	1 x GE	1 x GE	2 x RS232/422/485	LTE Cat.6 Wi-Fi	-	1	1	1	-	0/1
WR322GR-WLAN+LTE		Embedded	1 x GE	1 x GE	2 x RS232/422/485	2.4G 11n/5G 11ac Wi-Fi	LTE Cat.4	1	1	2	Yes	0/1
WR322GR-WLAN+LTE6		Embedded	1 x GE	1 x GE	2 x RS232/422/485	2.4G 11n/5G 11ac	LTE Cat.6	1	1	2	Yes	0/1
WR312G-LTE	D	Embedded	1 x GE	1 x GE	2 x RS232/422/485	LTE Cat.4	-	1	-	2	*1	0/1
WR312G-LTE6	D	Embedded	1 x GE	1 x GE	2 x RS232/422/485	LTE Cat.6	-	1	-	2	*1	0/1
WR312G-LTE	C	Embedded	1 x GE	1 x GE	1 x RS232/422/485	LTE Cat.4	-	-	-	2	*1	0/1
WR312G-LTE6		Embedded	1 x GE	1 x GE	1 x RS232/422/485	LTE Cat.6	-	-	-	2	*1	0/1
WR322GR-WLAN+LTE		Embedded	1 x GE	1 x GE	1 x RS232/422/485	2.4G 11n/5G 11ac	LTE Cat.4	-	-	2	Yes	0/1
WR322GR-WLAN+LTE6		Embedded	1 x GE	1 x GE	1 x RS232/422/485	2.4G 11n/5G 11ac	LTE Cat.6	-	-	2	Yes	0/1
WR312G-LTE	E	OpenWRT	1 x GE	1 x GE	2 x RS232/422/485	LTE Cat.4	-	1	1	1	-	0/1
WR312G-LTE6		OpenWRT	1 x GE	1 x GE	2 x RS232/422/485	LTE Cat.6	-	1	1	1	-	0/1

*1: GPS support for WR312G-LTE series is by request



Ordering Information

Model Name	Description
WR302G	Industrial Secure Serial Server, 2GbE+2COM, USB, SD
WR312G-WLAN	Industrial Secure Wireless Router, 2GbE+2COM, USB, SD, 802.11ac/n WLAN
WR312G-LTE-E	Industrial Secure Cellular Router, 2GbE+2COM, USB, SD, LTE-E, 1SIM, FDD B1/3/5/7/8/20, TDD B38/40/41
WR312G-LTE-CN	Industrial Secure Cellular Router, 2GbE+2COM, USB, SD, LTE-CN, 1SIM, FDD B1/B3/B5/B8, TDD B38/B39/B40/B41
WR312G-LTE6-E	Industrial Secure Cellular Router, 2GbE+2COM, USB, SD, LTE-E Cat.6, 1SIM, FDD B1/3/5/7/8/20/28/32, TDD B38/40/41
WR322GR-WLAN+LTE-E	Industrial Secure Cellular Router, 2GbE+2COM, USB, SD, 802.11ac/n WLAN, LTE-E, GPS, 2SIM, FDD B1/3/5/7/8/20, TDD B38/40/41
WR322GR-WLAN+LTE-CN	Industrial Secure Cellular Router, 2GbE+2COM, USB, SD, 802.11ac/n WLAN, LTE-CN, GPS, 2SIM, FDD B1/B3/B5/B8, TDD B38/B39/B40/B41
WR322GR-WLAN+LTE6-E	Industrial Secure Cellular Router, 2GbE+2COM, USB, SD, 802.11ac/n WLAN, LTE-E Cat.6, GPS, 2SIM, FDD B1/3/5/7/8/20/28/32, TDD B38/40/41
WR312G-LTE-E (C Series)	Industrial Secure Cellular Router, 2GbE+1COM, LTE-E, 2SIM, FDD B1/3/5/7/8/20, TDD B38/40/41
WR312G-LTE-CN (C Series)	Industrial Secure Cellular Router, 2GbE+1COM, LTE-CN, 2SIM, FDD B1/B3/B5/B8, TDD B38/B39/B40/B41
WR312G-LTE6-E (C Series)	Industrial Secure Cellular Router, 2GbE+1COM, LTE-E Cat.6, 2SIM, FDD B1/3/5/7/8/20/28/32, TDD B38/40/41
WR322GR-WLAN+LTE-E (C Series)	Industrial Secure Cellular Router, 2GbE+1COM, 802.11ac/n WLAN, LTE-E, GPS, 2SIM, FDD B1/3/5/7/8/20, TDD B38/40/41
WR322GR-WLAN+LTE-CN (C Series)	Industrial Secure Cellular Router, 2GbE+1COM, 802.11ac/n WLAN, LTE-CN, GPS, 2SIM, FDD B1/B3/B5/B8, TDD B38/B39/B40/B41
WR322GR-WLAN+LTE6-E (C Series)	Industrial Secure Cellular Router, 2GbE+1COM, 802.11ac/n WLAN, LTE-E Cat.6, GPS, 2SIM, FDD B1/3/5/7/8/20/28/32, TDD B38/40/41
WR312G-LTE-E (D Series)	Industrial Secure Cellular Router, 2GbE+2COM, USB, LTE-E, 2SIM, FDD B1/3/5/7/8/20, TDD B38/40/41
WR312G-LTE-CN (D Series)	Industrial Secure Cellular Router, 2GbE+2COM, USB, LTE-CN, 2SIM, FDD B1/B3/B5/B8, TDD B38/B39/B40/B41
WR312G-LTE6-E (D Series)	Industrial Secure Cellular Router, 2GbE+2COM, USB, LTE-E Cat.6, 2SIM, FDD B1/3/5/7/8/20/28/32, TDD B38/40/41
WR312G-LTE-E (E Series)	Industrial Secure Cellular Router, 2GbE+2COM, USB, SD, LTE-E, 1SIM, FDD B1/3/5/7/8/20, TDD B38/40/41
WR312G-LTE-CN (E Series)	Industrial Secure Cellular Router, 2GbE+2COM, USB, SD, LTE-CN, 1SIM, FDD B1/B3/B5/B8, TDD B38/B39/B40/B41
	*Embedded SIM by request *LTE-AU/LTE-U Cat.4 by request *LTE-AP/LTE-U Cat.6 by request *Dual LTE concurrent by request *GPS support for WR312G-LTE series by request *NB-IoT + M1 by request
Package List	
	1 x Product Unit
	1 x 6-pin Removable Terminal Connector
	1 x Quick Installation Guide
	1 x Attached Din Clip
	Default Enclosed Antennas:
	WR312G-LTE: 2 x LTE Antennas, Black
	WR312G-WLAN: 2 x Wi-Fi Antennas, White
	WR322GR-WLAN+LTE: 2 x LTE Antennas, Black + 2 x Wi-Fi Antennas, White




Ordering Information

A-LTE_WLAN_G-4_4-RSM-2M	Combo IP67 Antenna, LTE WW 4dBi, Wi-Fi 2.4/5GHz dual band Omni-directional 4/4dBi, GPS 1561-1670MHz 28dBi, RP-SMA male, 2M
A-LTE_WLAN_G-3_2-RSM-2M	Combo IP67 Antenna, LTE WW 3dBi, Wi-Fi 2.4/5GHz dual band Omni-directional 2/2dBi, GPS 1575-1610MHz 28dBi, RP-SMA male, 2M
A-LTE-3-NM	LTE Antenna, LTE WW 3dBi, N-type male
A-WLAN-6-NM	Wi-Fi Antenna, Wi-Fi 2.4/5GHz dual band Omni-directional 4/6dBi, N-type male
A-GPS-27-RSM-3M	GPS Antenna, GPS 1575MHz 27dBi, RP-SMA male, 3M
A-GPS-2-NM	GPS Antenna, GPS 1575MHz 2dBi, N-Type male
C-RF-R-RSF_RSM-1M	RF cable, RP-SMA female to RP-SMA male, 1M
C-RF-C2-NF_RSM-2M	RF cable, N-type female to RP-SMA male, CFD200, 2M

Outdoor Vehicle Combo Antenna

A-LTE_WLAN_G-4_4-RSM-2M

- 5 RF cables, LTE MIMO, Wi-Fi MIMO, GPS/GLONASS/GALILEO/BEIDOU
- 4dBi gain for LTE and 4dBi gain for 2.4G/5G WIFI RF
- High WLAN gain is perfect for train to ground vehicle application
- 5 x 2 meter cables in RP SMA male connector
- Outdoor high gain, IP67 waterproof and -40°~85°C wide temperature design
- 189x182x107mm

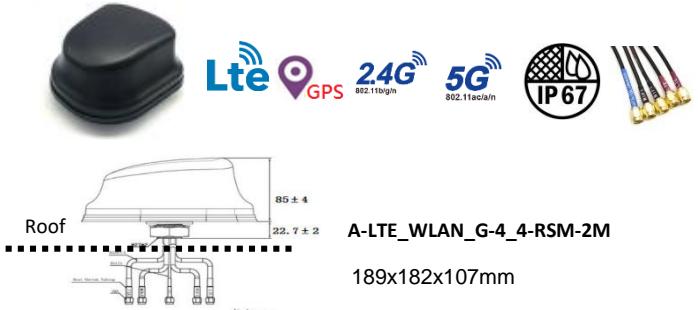

A-LTE_WLAN_G-3_2-RSM-2M

- 5 RF cables, LTE MIMO, Wi-Fi MIMO, GPS&GLONASS
- 3dBi gain for LTE and 2dBi gain for 2.4G/5G WIFI
- Suitable for in-vehicle, roadside box and short range coverage WLAN to LTE communication environment
- 5 x 2 meter cables in RP SMA male connector
- Outdoor IP67 waterproof and -40°~85°C wide temperature
- 110x110x80mm slim size



	Model	Type	Frequency (MHz)	Gain (dBi)	Connector	Dimension (mm)	Cable (M)	Operating Temp.	Application
	A-LTE_WLAN_G-4_4-RSM-2M (optional)	Omni	LTE: 698~960/1710~2690/2900~3600 WLAN: 2400~2483.5/4900~5825 GNSS: 1561.1~1610 (GPS/GLONASS/GALILEO/BEIDOU)	4 4 28	5x RP SMA Male	189x182x107	2	-40°C~85°C	Outdoor
	A-LTE_WLAN_G-3_2-RSM-2M (optional)	Omni	LTE: 698~960/1710~2690 WLAN: 2400~2483.5/4900~5825 GNSS: 1575.42~1610 (GPS/GLONASS)	3 2 28	5x RP SMA Male	110x110x80	2	-40°C~85°C	Outdoor

LTE Antenna

	Model	Type	Frequency (MHz)	Gain (dBi)	Connector	Dimension (mm)	Cable (M)	Operating Temp.	Application
	A-LTE-2-RSM (Default)	Omni	704~960/1710~2690	2	RP SMA Male	161xΦ13	-	-20°C~65°C	Indoor
	A-LTE-3-NM (optional) (require RF cable)	Omni	704~960 1710~2700	2 3	N-Type Male	187xΦ20	-	-20°C~65°C	Outdoor

Wi-Fi Antenna

	Model	Type	Frequency (MHz)	Gain (dBi)	Connector	Dimension (mm)	Cable (M)	Operating Temp.	Application
	A-WLAN-3-RSM (Default)	Omni	2400~2500 4900~5900	2.5 3	RP SMA Male	196xΦ13	-	-40°C~65°C	Indoor
	A-WLAN-6-NM (optional) (require RF cable)	Omni	2400~2500 5150~5850	4 6	N-Type Male	187xΦ20	-	-20°C~65°C	Outdoor

GPS Antenna

	Model	Type	Frequency (MHz)	Gain (dBi)	Connector	Dimension (mm)	Cable (M)	Operating Temp.	Application
	A-GPS-27-RSM-3M (optional)	Omni	1575.42	27	RP SMA Male	36x36x13.9	3	-20°C~65°C	Indoor
	A-GPS-2-NM (optional) (require RF cable)	Omni	1575.42	2	N-Type Male	187xΦ20	-	-20°C~65°C	Outdoor